

SPECIFICATIONS

BANNOCKBURN™ TWO HANDLE WIDESPREAD LAVATORY FAUCET


Model

D304056 (Replaces D307456 series)

Description

- Ceramic disc valves
- 6 ¼" high spout, 5 ¼" spout length, laminar flow
- With drain assembly
- 3 hole mount, 6" - 12" installation
- A112.18.1M, 1.5 gpm (5.7 LPM) maximum flow rate @ 20 - 80 psi

Flow Rate

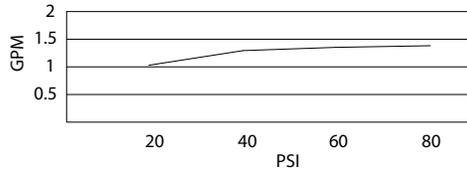

Standards



- NSF 61-9
- Energy Policy Act of 1992



- ASME A112.18.1M/A112.18.1
- NSF/ANSI 372
- CSA B125.1



- ADA Accessibility Guidelines for Buildings and Facilities - 4.27.4 Controls and Mechanisms




Finishes Available

- Chrome
- Other: Refer to Price List for additional finish

Warranty

Danze products are covered by a manufacturer's limited "lifetime" warranty for manufacturing defects.

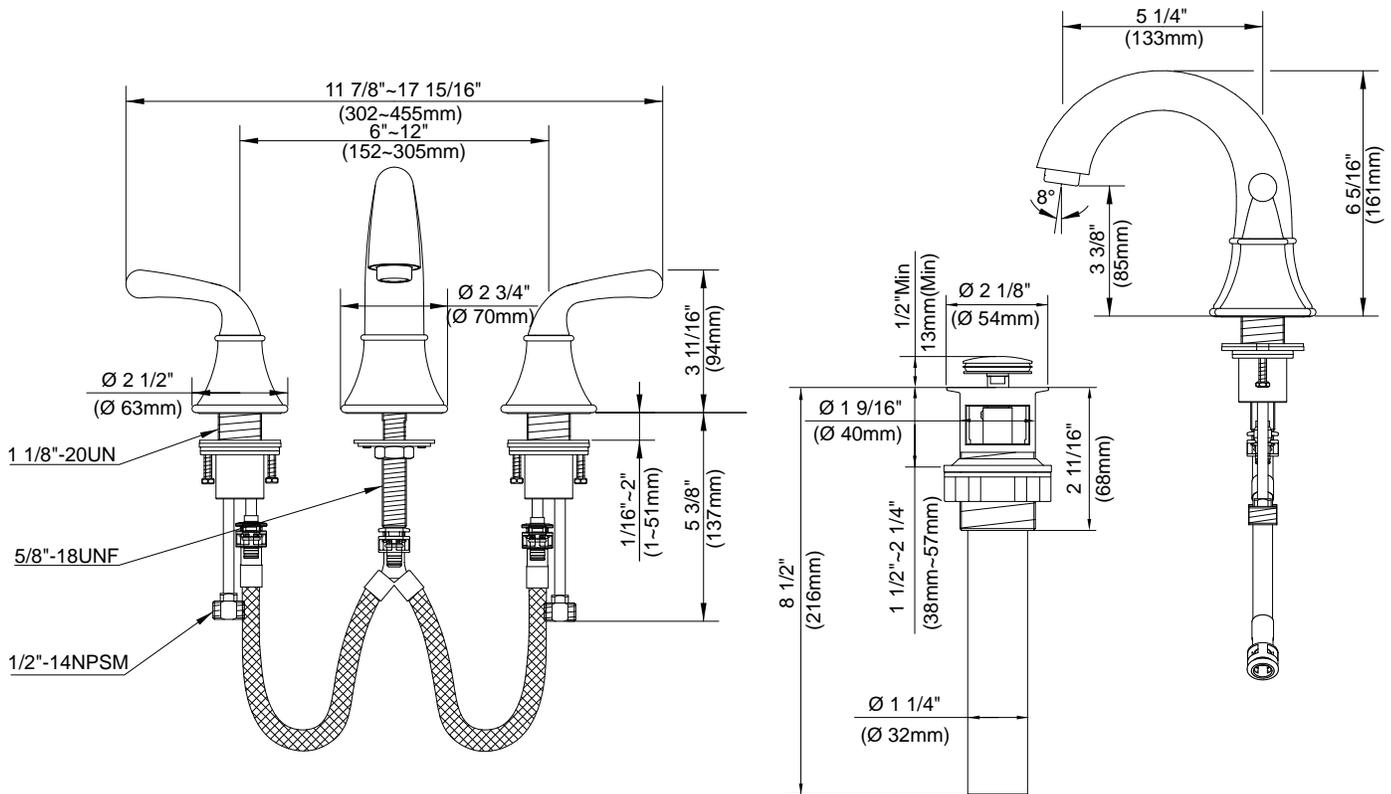

Submittal Information:

Job Name: _____
 Contractor: _____

Location: _____
 Contact #: _____